

# **GPS/GLONASS Module MGGS2217 Specification**

Version 2.2

2011/6

## Revision history

Title				
Model No				
Document No				
Revision	Date	Description	CHECK	APPR
Ver 1.0	2011.03	Original Draft		
Ver 2.0	2011.05.09	Modified 1.2 feature error 2.2.1 DC power 4.1 Definition of pin assignment		
Ver 2.1	2011.06.22	Modified 2.2.1 DC Power 2.2.2 serial Port 3.1 NMEA V4.00 Protocol Add 1.2 Future Power consumption 4.2 Electrical specification 4.3 Operating Conditions 4.4 Application circuit 5 Product handling <b>Appendix A</b> Added Module size Del 1.3 Strat Now™ technology SDK tool by OEM customization API to save external mcu of the system 2.5 Absolute Maximum Ratings		
Ver2.2	2011.06.28	Modified 1.2 Feature 4.3 Operating Conditions 4.4 Application circuit		

# CONTENTS

<b>1. Introduction</b>	<b>6</b>
1.1 Over view	6
1.2 Feature	6
1.3 Start Now™ technology	7
1.4 Product Application	7
<b>2. Technical Specifications</b>	<b>8</b>
<b>2.1 General Characteristics</b>	<b>8</b>
2.1.1 General	8
2.1.2 Accuracy	8
2.1.3 Datum	8
2.1.4 Time to First Fix (TTFF)	8
2.1.5 Sensitivity	9
2.1.6 Dynamic condition	9
<b>2.2 Electrical Characteristics</b>	<b>9</b>
2.2.1 DC Power	9
2.2.2 Serial Port	9
<b>2.3 Environmental Characteristics</b>	<b>10</b>
<b>2.4 Physical Characteristics</b>	<b>10</b>
<b>3. Software interface</b>	<b>11</b>
<b>3.1 NMEA V4.00 Protocol</b>	<b>11</b>
3.1.1 GGA—Global Positioning System Fixed Data	11
3.1.2 GLL—Geographic Position –Latitude/Longitude	12
3.1.3 GSA—GNSS DOP and Active Satellites	13
3.1.4 GSV—GNSS Satellites in View	14
3.1.5 RMC—Recommended Minimum Specific GNSS Data	15
3.1.6 VTG—Course Over Ground and Ground Speed	16
<b>3.2 MStar NMEA Command</b>	<b>17</b>
<b>4. Hardware interface</b>	<b>17</b>
4.1 Definition of Pin assignment	17
4.2 Electrical specification	20
4.3 Operating Conditions	20
4.4 Application circuit	21
<b>5. Product handling</b>	<b>21</b>
5.1 Packaging	21
5.2 Reels	21

---

5.3 Tapes	22
5.4 Moisture sensitivity levels	22
5.5 Shipment	22
5.6 Reflow soldering	23
5.7 ESD handling	23
<b>Appendix A. Foot-print &amp; Outline drawing</b>	<b>24</b>
<b>Appendix B. Marking Information</b>	<b>25</b>

## 1. Introduction

### 1.1 Overview

MGGS2217 module is a highly sensitivity, ultra compact GPS/GLONASS application. It includes MSR2112 RF receiver and a MSB2311 baseband processor comprises a full-featured GPS/GLONASS baseband processor, a Flash memory and a power management unit. The RF receiver employs a single conversion digital low-IF architecture, the high level integration leaves only few off-chip matching and decoupling components really minimize the system cost. The baseband processor is controlled by adaptive signal processing and navigation firmware optimized for execution on low power microprocessor. Sophisticated adaptive control algorithms provide optimal signal acquisition/tracking strategy.

### 1.2 Feature

GPS L1 and GLONASS L1

High sensitivity of -161dBm in tracking & -144dBm in acquisition(cold start)

RF receiver of noise figure at 2.0dB

Build in power-on-reset and calibration circuits

Assisted/Autonomous operation

Fast TTFF in all modes ( a typical outdoor )

hot-start in 1s,

warm-start in 32s

cold-start in 34s

Deep Indoor < 20s typical

Up to 10,000,000 search windows per second

80 acquisition & 20 tracking channels

DGPS & SBAS (WAAS/EGNOS/MSAS) capable

Support standard NMEA-0183 & Mstar binary protocol

TCXO & RTC integrated

Integrate a high-performance embedded CPU

Integrate a 1MB serial flash memory

Frequency-locking between -40 °C ~ 125 °C

Easy to integrate,

- Flexible RF interface – compatible with various frequency plan

- Dual UART data interface

- I2C & SPI interface

- Numerous GPIO

- Wheel trick , PWM and ADC input

Operate in 1.2V/3.1V (core/IO), integrate LDO

Power consumption at 3.3V (20 channels active)

- 250mW acquisition

- 215mW tracking

Battery backed RAM & RTC and direct connection

0.18um CMOS for RF and 65nm Baseband

### **1.3 Start Now™ technology**

Mstar Start Now™ AGPS for GSM/3GPP & CDMA for extended ephemeris and fast TTFFs (mobile phone & tracker)

Mstar Start Now™ MGAN™-LTE (long term ephemeris) for extended 5~7days ephemeris and fast TTFFs (PND & tracker/logger)

Advanced power management for trickling and position-fix™ power management

### **1.4 Product Application**

PND

Mobile Phone

UMPC

Tracker & Logger units

MP3 GPS

GPS Watch

DSC GPS and related

## 2. Technical Specifications

### 2.1 General Characteristics

#### 2.1.1 General

Frequency	GPS L1, 1575.42 MHz GNSS L1, 1602 MHz
Acquisition Channel	80
Tracking Channel	20

#### 2.1.2 Accuracy

Position	2m CEP
Velocity	0.1 m/s
Time	1PPS <20 ns resolution

#### 2.1.3 Datum

WGS-84	Default WGS84
--------	---------------

#### 2.1.4 Time To First Fix (TTFF)

Hot start	1sec., average
Warm start	32sec., average
Cold start	34sec., average

2.1.5 Sensitivity

Tracking Sensitivity	-161dBm, typical
Acquisition Sensitivity	-144dBm, typical for cold start

2.1.6 Dynamic condition

Altitude	18000m(Max)
Velocity	515m/s(Max)
Acceleration	4g
Jerk	1g/s

**2.2 Electrical Characteristics**

2.2.1 DC Power

Voltage	+3.3V ~ +5.0V DC
Supply current	Under 100 mA @ 5.0V DC Typical
Backup Battery Power	+3.3V DC

2.2.2 Serial Port

Electrical Interface	Two full duplex serial communication
Baud rate	4.8K /9.6K Default /19.2K /38.4K /57.6K/115.2K
Navigation update rate	1Hz
Protocol Message	NMEA-0183 Ver 4.00

### 2.3 Environmental Characteristics

Operating range	-40°C ~ +85°C
Storage range	-40°C ~ +150°C
Relative Humidity	5% ~ 80%

### 2.4 Physical Characteristics

Length	22.4 mm
Width	17.0 mm

### 3. Software Interface

#### 3.1 NMEA V4.00 Protocol

Its output signal level is TTL: 9600bps (default), 8 bit data, 1 stop bit and no parity. It supports the following NMEA-0183

Messages: GGA, GLL, GSA, GSV, RMC and VTG.

NMEA Output Messages: the module board outputs the following messages as shown in Table

Table 1 NMEA-0183 Output Messages

NMEA Record	Description
GGA	Global positioning system fixed data
GLL	Geographic position – latitude / longitude
GSA	GNSS DOP and active satellites
GSV	GNSS satellites in view
RMC	Recommended minimum specific GNSS data
VTG	Course over ground and ground speed

#### 3.1.1 GGA-Global Positioning System Fixed Data

Table 2 contains the values of the following example:

\$GPGGA, 161229.487, 3723.2475, N, 12158.3416, W, 1, 07, 1.0, 9.0, M, , , ,  
,0000\*18

Table 2 GGA Data Format

Name	Example	Units	Description
Message ID	\$GPGGA		GGA protocol header
UTC Position	161229.487		hhmmss.sss
Latitude	3723.2475		ddmm.mmmm
N/S Indicator	N		N=north or S=south
Longitude	12158.3416		Dddmm.mmmm

E/W Indicator	W		E=east or W=west
Position Fix Indicator	1		See Table 2-1
Satellites Used	07		Range 0 to 12
HDOP	1.0		Horizontal Dilution of Precision
MSL Altitude	9.0	meters	
Units	M	meters	
Geoid Separation		meters	
Units	M	meters	
Age of Diff. Corr.		second	Null fields when DGPS is not used
Diff. Ref. Station ID	0000		
Checksum	*18		
<CR> <LF>			End of message termination

Table 2-1 Position Fix Indicator

Value	Description
0	Fix not available or invalid
1	GPS SPS Mode, fix valid
2	Differential GPS, SPS Mode, fix valid
3	GPS PPS Mode, fix valid

### 3.1.2 GLL-Geographic Position –Latitude/Longitude

Table 3 contains the values of the following Example:

\$GPGLL, 3723.2475, N, 12158.3416, W, 161229.487, A\*2C

Table 3 GLL Data Format

Name	Example	Units	Description
Message ID	\$GPGLL		GLL protocol header
Latitude	3723.2475		ddmm.mmmm
N/S Indicator	N		N=north or S=south

Longitude	12158.3416		Dddmm.mmmm
E/W Indicator	W		E=east or W=west
UTC Position	161229.487		hhmmss.ss
Status	A		A=data valid or V=data not valid
Checksum	*2C		
<CR> <LF>			End of message termination

### 3.1.3 GSA-GNSS DOP and Active Satellites

Table 4 contains the values of the following example:

\$GPGSA, A, 3, 07, 02, 26, 27, 09, 04, 15, , , , , 1.8,1.0,1.5\*33

Table 4 GSA Data Format

Name	Example	Units	Description
Message ID	\$GPGSA		GSA protocol header
Mode 1	A		See Table 4-2
Mode 2	3		See Table 4-1
Satellite Used	07		Sv on Channel 1
Satellite Used	02		Sv on Channel 2
.....			.....
Satellite Used			Sv on Channel 12
PDOP	1.8		Position Dilution of Precision
HDOP	1.0		Horizontal Dilution of Precision
VDOP	1.5		Vertical Dilution of Precision
Checksum	*33		
<CR> <LF>			End of message termination

Table 4-1 Mode 1

Value	Description
1	Fix not available
2	2D
3	3D

Table 4-2 Mode 2

Value	Description
M	Manual-forced to operate in 2D or 3D mode
A	Automatic-allowed to automatically switch 2D/3D

### 3.1.4 GSV-GNSS Satellites in View

Table 5 contains the values of the following example:

\$GPGSV, 2, 1, 07, 07, 79, 048, 42, 02, 51, 062, 43, 26, 36, 256, 42, 27, 27, 138, 42\*71

\$GPGSV, 2, 2, 07, 09, 23, 313, 42, 04, 19, 159, 41, 15, 12, 041, 42\*41

Table 5 GSV Data Format

Name	Example	Units	Description
Message ID	\$GPGSV		GSV protocol header
Number of Messages <sup>1</sup>	2		Range 1 to 3
Messages Number <sup>1</sup>	1		Range 1 to 3
Satellites in View	07		
Satellite ID	07		Channel 1(Range 1 to 32)
Elevation	79	degrees	Channel 1(Maximum 90)
Azimuth	048	degrees	Channel 1(True, Range 0 to 359)
SNR (C/No)	42	dBHz	Range 0 to 99, null when not tracking
....			....
Satellite ID	27		Channel 4(Range 1 to 32)
Elevation	27	degrees	Channel 4(Maximum 90)
Azimuth	138	degrees	Channel 4(True, Range 0 to 359)
SNR (C/No)	42	dBHz	Range 0 to 99, null when not tracking
Checksum	*71		
<CR> <LF>			End of message termination

<sup>1</sup> Depending on the number of satellites tracked multiple messages of GSV data may be required.

### 3.1.5 RMC-Recommended Minimum Specific GNSS Data

Table 6 contains the values of the following example:

\$GPRMC, 161229.487, A, 3723.2475, N, 12158.3416, W, 0.13, 309.62, 120598, , \*10

Table 6 RMC Data Format

Name	Example	Units	Description
Message ID	\$GPRMC		RMC protocol header
UTC Position	161229.487		hhmmss.sss
Status	A		A=data valid or V=data not valid
Latitude	3723.2475		ddmm.mmmm
N/S Indicator	N		N=north or S=south
Longitude	12158.3416		dddmm.mmmm
E/W Indicator	W		E=east or W=west
Speed Over Ground	0.13	knots	
Course Over Ground	309.62	degrees	True
Date	120598		ddmmyy
Magnetic Variation		degrees	E=east or W=west
Checksum	*10		
<CR> <LF>			End of message termination

### 3.1.6 VTG-Course Over Ground and Ground Speed

Table 7 contains the values of the following example:

\$GPVTG, 309.62, T, , M, 0.13, N, 0.2, K\*6E

Table 7 VTG Data Format

Name	Example	Units	Description
Message ID	\$GPVTG		VTG protocol header
Course	309.62	degrees	Measured heading

Reference	T		True
Course		degrees	Measured heading
Reference	M		Magnetic
Speed	0.13	knots	Measured horizontal speed
Units	N		Knots
Speed	0.2	km/hr	Measured horizontal speed
Units	K		Kilometer per hour
Checksum	*6E		
<CR> <LF>			End of message termination


### 3.2 MStar NMEA Command

<1>Cold Start Command  
\$PMST02,58\*39

<2>Warm Start Command  
\$PMST02,48\*38

<3>Hot Start Command  
\$PMST02,0\*04

## 4. Hardware interface

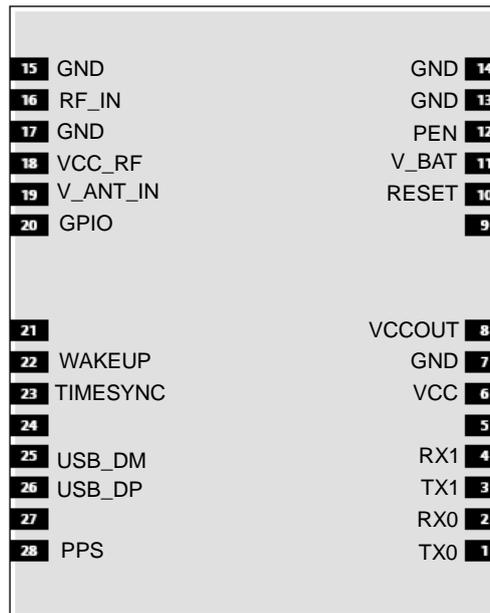

### 4.1 Definition of Pin assignment

Pin	Signal Name	I/O	Description	Characteristics
1	TX0 I2C_SDA	O	Serial port 0 I2C serial data	$V_{OH}$ VDD-0.1 $V_{OL}$ 0.1V
2	RX0 I2C_SCL	I	Serial port 0 I2C serial clock	$V_{IH}$ 2.5V $V_{IL}$ 0.8V
3	TX1	O	Serial port 1	$V_{OH}$ VDD-0.1 $V_{OL}$ 0.1V
4	RX1	I	Serial port 1	$V_{IH}$ 2.5V $V_{IL}$ 0.8V
5	NC			
6	VCC	I	DC Supply Voltage Input	+3.3V~+5.0V
7	GND	G	Ground	
8	VCCOUT	O	DC output	
9	NC			
10	RESETN	I	Reset function	This input is low active.
11	V_BAT	I	RTC Power	+2.5V~+5.0V
12	PEN	I	Standby Pin	Active low
13	GND	G	Ground	
14	GND	G	Ground	
15	GND	G	Ground	
16	RF_IN	I	GPS Signal Input	50

17	GND	G	Ground	
18	VCC_RF	O	Supply Antenna Bias Voltage	$V_o = VCC - 0.2$
19	V_ANT_IN	I	Active Antenna Bias Voltage	Receive DC power supply for active antenna bias
20	GPIO	I/O		Reserved
21	NC			
22	WAKE UP			
23	TIMESYNC	I		TIMESYNC
24	VDD_USB	I	USB power input	
25	USB_DM			
26	USB_DP			
27	NC			
28	1PPS	O	1 Pulse Per Second	1PPS

### RX0

This is the auxiliary receiving channel and is used to input differential corrections to the board to enable DGPS navigation.

### TX0

For user's application (not currently used).

### RX1

This is the main receiver channel and is used to receive software commands to the board from debug software or from user written software.

### TX1

This is the main transmitting channel and is used to output navigation and measurement data to debug software or user written software.

### VCC

3.3V ~ 5V is acceptable operation range of main power supply. The DC power ripple is required for less than 50mVpp.

### GND

GND provides the ground.

### VCCOUT

This pin provides DC voltage output.

### RESETN

On module power up, this signal should remain low until power stable.

This input is low active.

**V\_BAT**

This is the battery backup input that powers the SRAM and RTC when main power is removed. Without an external backup battery, the TMP will execute a cold start after every power on. To achieve the faster start-up offered by a hot or warm start, either a battery backup must be connected or a super cap installed.

2.5V ~ 5.0V is acceptable operation range of main power supply. The DC power ripple is required for less than 50mVpp.

**PEN**

Pull low into standby mode.

**RF\_IN**

The GPS module input is optimized to connect to a 50 ohm antenna. The minimized noise figure is achieved by -10dB input return loss. Well controlled antenna impedance (as close to 50ohm as possible) remains the stable system sensitivity. Do not try to match the GPS module to 50ohm for lower return loss which might induce the noise figure increased.

The impedance of RF traces between GPS module, matching network, and antenna has to be controlled in 50ohm +/-10%. More and tight ground vias surround the RF traces is benefit to isolate interference out.

**VCC\_RF**

This pin provides DC voltage for active antenna.

**V\_ANT\_IN**

This pin is reserved an external DC power supply for active antenna.

**GPIO**

Reserved.

**TIMESYNC**

In case of Conventional Autonomous Mode, This pin should be pull down (4.7K~10.0K )

**1PPS**

GPS Additional Function (1 Pulse Per Second)

## 4.2 Electrical specification

### Absolute Maximum ratings


Parameter	Symbol	Condition	Min	Max	Units
Power supply voltage	VCC		-0.5	5.5	V
Backup battery Voltage	V_BAT		-0.5	5.5	V
USB power supply voltage	VDDUSB			5.5	V
VCC_RF output current	Iccrf			100	mA
Human Body Model ESD capability	V <sub>ESD_HBM</sub>			2000	V
Machine Model ESD capability	V <sub>ESD_MM</sub>			75	V
Storage temperature	Tstg		-40	150	

## 4.3 Operating Conditions

All specifications are at an ambient temperature of 25

Parameter	Symbol	conditions	Min	Typ	Max	Units
Power supply voltage	VCC		3.3		5.0	V
VCC Supply current	I <sub>cc</sub> Acquisition	VCC = 3.3V		75		mA
		VCC = 5.0V		67		
	I <sub>cc</sub> Tracking	VCC = 3.3V		65		mA
		VCC = 5.0V		61		
I <sub>cc</sub> Standby	VCC=3.3V V <sub>pen</sub> =0V		35		uA	
Backup battery Voltage	V_BAT		2.5	3.0	5.0	V
Backup battery current	I <sub>bat</sub>	V_BAT=3.3V VCC=0V		16.5		uA
VDDUSB pin24 for USB operation	VDDUSB		3.3	5.0	5.5	V
VCC_RF output Voltage	V <sub>ccrf</sub>		VCC-0.2			V
VCC_RF output current	I <sub>ccrf</sub>				50	mA
VCCOUT output Voltage	V <sub>ccout</sub>		3.0	3.1	3.2	V
VCCOUT output current	I <sub>ccout</sub>				50	mA
V_ANT supply voltage	V <sub>ant</sub>		3.0		5.0	V
V_ANT supply current	I <sub>ant</sub>		Depend on active antenna bias current			mA
Input return loss	R <sub>Lin</sub>	RF_IN		10		dB
Power Gain	S <sub>21</sub>			20		dB
Operating temperature	T <sub>opt</sub>		-40		85	

## 4.4 Application Circuit

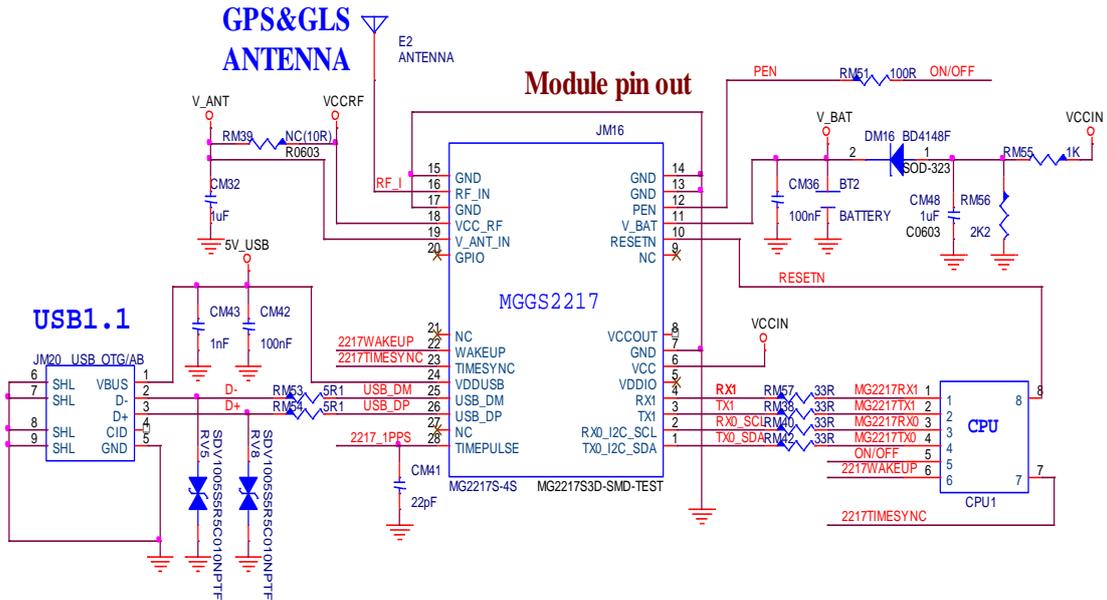

## 5. Product handling


### 5.1 Packaging

Modules are delivered as hermetically, tape reel in order to enable efficient production.




### 5.2 Reels

Modules are deliverable in quantities of 500pcs on a reel. The dimensions of the reel are shown as below.

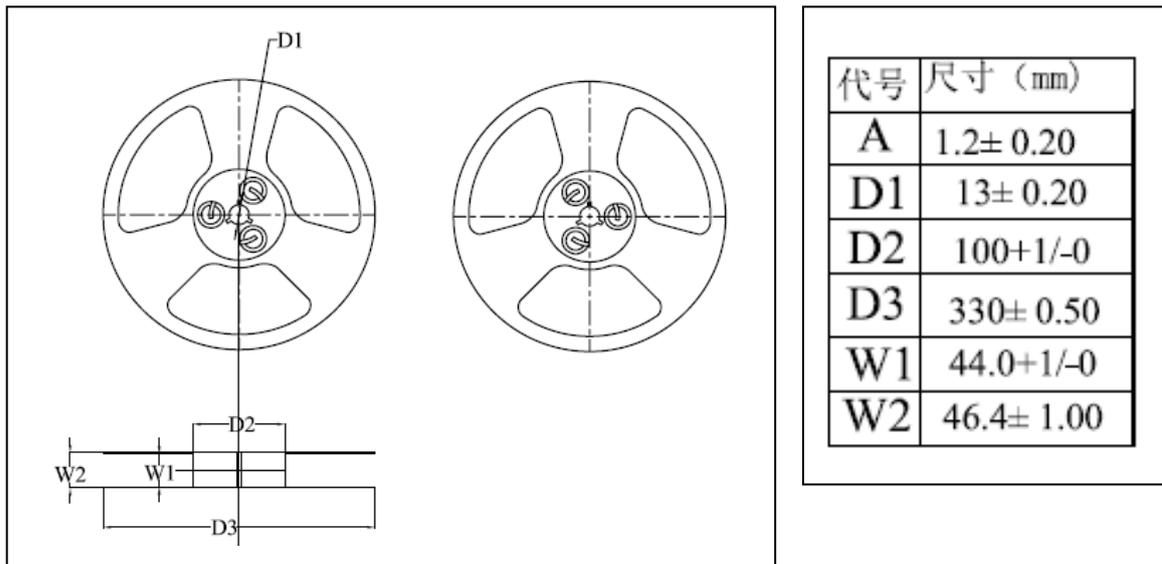

### 5.3 Tapes

The dimensions and orientations of the tapes for MGGS2217 modules are specified below picture.

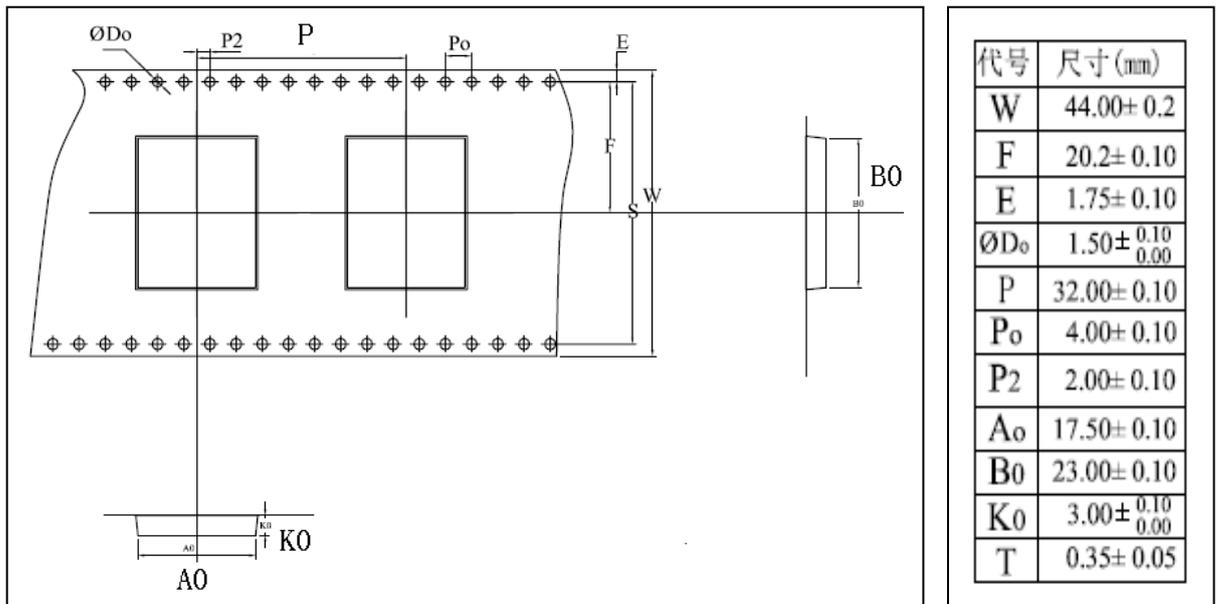

### 5.4 Moisture Sensitivity Levels

The Moisture Sensitivity Level (MSL) relates to the packaging and handling precautions required. Modules are rated at MSL level 4


For MSL standard see IPC/JEDEC J-STD-020, that can be download from [www.jedec.org](http://www.jedec.org)

### 5.5 Shipment

MGGS2217 modules are delivered on Tape-and-Reels in a hermetically sealed package to prevent moisture intake and protect against electrostatic discharge. For protection from physical damage.

### 5.6 Reflow soldering

Recommmand the reflow profile show as below.

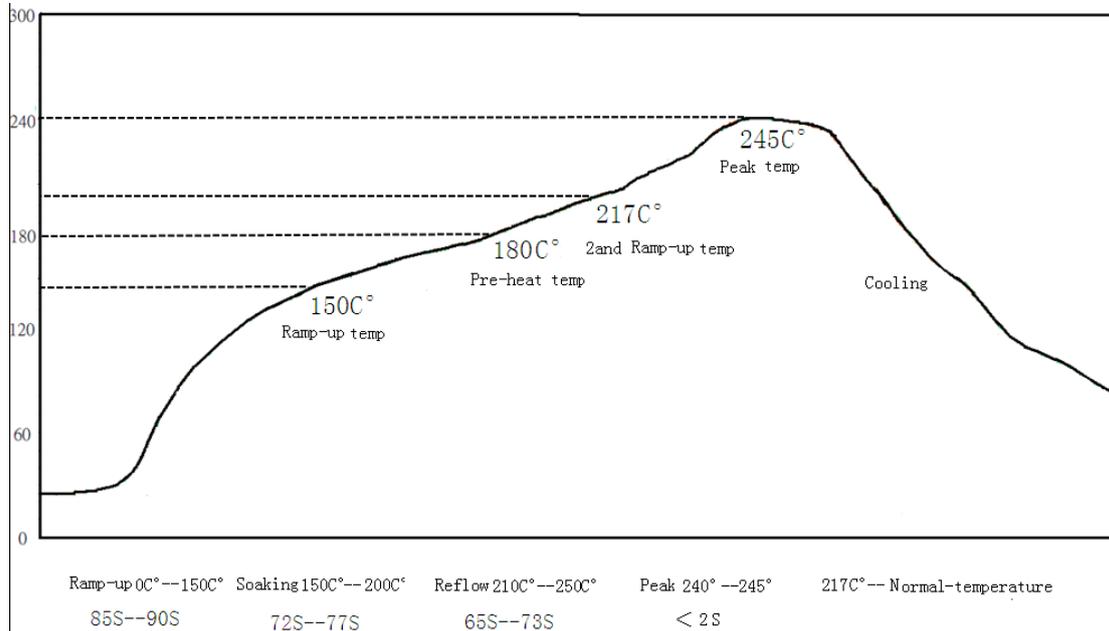

### 5.7 ESD handling


The modules are Electrostatic Sensitive Devices (ESD) and require special precautions when handling. Care must be exercised when handling path antennas, due to the risk of electrostatic charges. For ESD safety, the following measures should be taken into account Whenever handling the modules:



Connect ground of the device before solder an antenna patch.

To prevent electrostatic discharge through the RF\_IN do not Touch the mounted patch antenna.

When solder RF connectors and patch antennas to the Module's RF\_IN pin, make sure to use an ESD safe soldering iron.

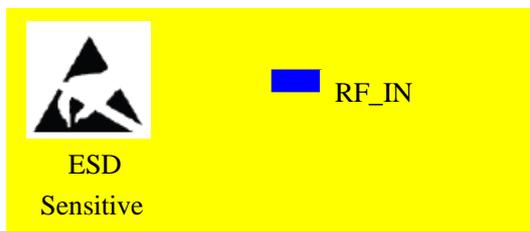



## Appendix B. Marking Information

<b>MGG</b>	<b>S</b>	<b>2217</b>
<b>1120</b>		

	<b>MGG</b>	Product type		<b>S</b>	Chipset
	<b>2217</b>	Module Size		<b>1120</b>	Date Code